

GEMINI LCD Mobile

Mobile stand for flat display/TV



LIST OF ITEMS:

- Base stand
- Mounting bracket for flat display/TV
- Mounting set
- Wheels 4pcs.
- Installation manual




1. Installation & Adjustment:


1A. Install 4 wheels „A” to the base stand of GEMINI.



1B. Vertical stainless steel poles – to the base stand of GEMINI according to picture below. Tighten the locking screws from bottom side of base stand.

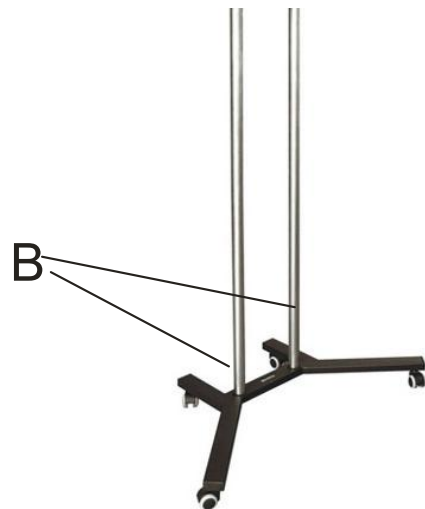


1C. Mounting element C install to vertical poles of the stand. Adjust desired height of mount. Then tighten the locking screws D.

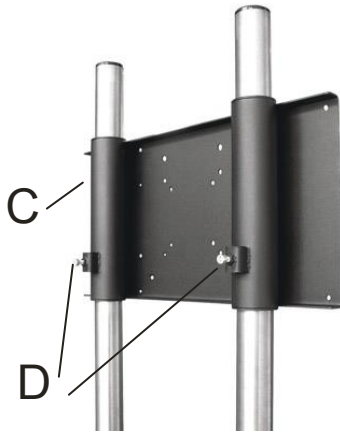

1D. Select your device VESA standard holes and install your LCD device. Use mounting screws from mounting set.

Warning! To connect the mount with flat display/TV, select the appropriate screws from the mounting kit according to the recommendations of flat display/TV. manufacturer.

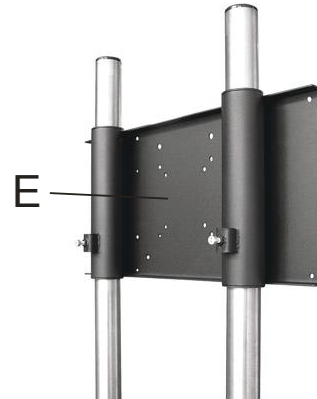

1E. If your GEMINI stand was delivered with optional shelf F – for VC system, laptop or SAT decoder, use it before step 2C. Adjust desired height of mount. Then tighten the locking screws. Ensure that shelf is stable on stand.



1A. Dismantling GEMINI LCD Mobile stand:
For easier transport or storage go through steps inverted order from 2D to 2A. Transport and storage All components together.

For GEMINI LCD Mobile stand Plasma monitors can be mounted. Order and use VIZ-ART. STATIC Plasma Mobile.

2. Technical Specification:

Product model:	GEMINI LCD Mobile
Adjustment:	LCD and shelf on desired height.
VESA mounting system:	75x75; 100x100; 100x200; 200x200; 200x400
Height of stand:	1582 mm

3. Mounting kit set:

bolts:	M8x20 – 2 pcs. (hex) M5x12 – 4 pcs. M6x12 – 4 pcs.
washers:	Ø8x16 – 2 pcs. Ø6x12 – 4 pcs.

Produced by: VIZ-ART Automation
tel.+48 22/6138899 www.viz-art.pl