

# VIZ-ART MASKED



**Advantages of the screen:**  
for installation in the suspended ceiling; a tensioned screen projection surface and the casing design are the most important attributes of a good screen.

**Functionality:** wide range of types projection surfaces available; every aspect ratio; stylish aluminium casing; full customization; Somfy drive with 2 years warranty; upper top BB; control options: IR, RF remote control, Trigger, RS232, LVC, SMART Box.



Screens for installation over a ceiling. Models selected for projects, where the elements of the theatre are to be visible as little as possible. The screen slides out of the ceiling at the time of projection and the casing remains almost imperceptible.

Easy installation at each stage of AV room furnishing.



## Screen MASKED (in ceiling)

Casing	aluminium, powder coated / RAL
Installation	• inside ceiling
P. surfaces:	<ul style="list-style-type: none"> <li>• Matt White</li> <li>• Matt White D.</li> <li>• Cine Grey</li> <li>• Perforated M. W.</li> <li>• 1,0G • 500g • 150° • 0,5mm</li> <li>• 1,0G • 400g • 150° • 0,35mm</li> <li>• 0,8G • 490g • 170° • 0,5mm</li> <li>• 1,0G • 650g • 150° • 0,5mm</li> </ul>

Image aspect ratio	<ul style="list-style-type: none"> <li>• 4:3</li> <li>• 16:9</li> <li>• 16:10</li> <li>• and more</li> </ul>
--------------------	--

Max. width of base [cm]	600
-------------------------	-----

Control system	<ul style="list-style-type: none"> <li>• wall switch</li> <li>• option: IR RF, Trigger 5-30V, Trigger 230V, RS232, LVC, SMART Box</li> </ul>
----------------	--

Back of projection surface	black (except Perforated M. W.)
----------------------------	---------------------------------



Power supply	SOMFY, 220V-60Hz, 230V-50Hz; 42dB
--------------	-----------------------------------

Options	<ul style="list-style-type: none"> <li>• „B” - Background</li> <li>• „BB” - top black belt</li> <li>• RAL - housing color</li> </ul>
---------	--

Set	<ul style="list-style-type: none"> <li>• screen;</li> <li>• mounting instruction manual;</li> <li>• wall switch;</li> <li>• assembly kit;</li> </ul>
-----	--

Warranty	2 years (power supply)
----------	------------------------


Producer	VIZ-ART Automation Europe
----------	---------------------------

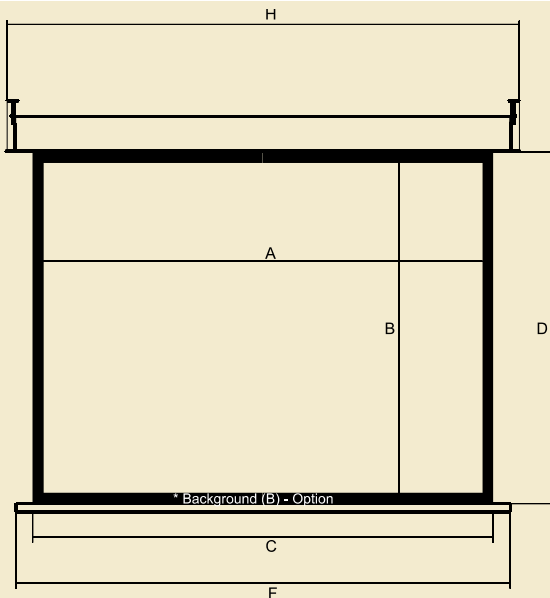

$*C = A + 100$   
 $*D = B + 100$   
 $E = C + 59$   
 $F = C + 20$   
 $G = C + 83$   
 $H = C + 45$

The gap in the ceiling:  
152 x (C + 104)

The gap in the ceiling

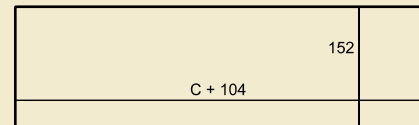

Width (cm)	Size (mm)					
	4:3		16:9		16:10	
	C	D	C	D	C	D
MASKED 200	2000	1500	2000	1130	2000	1250
MASKED 220	2200	1650	2200	1240	2200	1380
MASKED 240	2400	1800	2400	1350	2400	1500
MASKED 260	2600	1950	2600	1470	2600	1630
MASKED 280	2800	2100	2800	1580	2800	1750
MASKED 300	3000	2250	3000	1690	3000	1880
MASKED 350	3500	2630	3500	1970	3500	2190
MASKED 380	3800	2850	3800	2140	3800	2380

