



SUPER NOVA TENSION

Advantages of the screen: tensioned screen projection surface and unique casing design.

Functionality: stylish aluminium casing*; full customization; wall or ceiling installation; installation possible in a window; upper top BB; Somfy drive with 2 years warranty; control options: IR and RF, Trigger, RS232, LVC, SMART Box.



The latest screen design with a Tension system. The white casing (or according to RAL*) and full customization are the features of a dream screen.

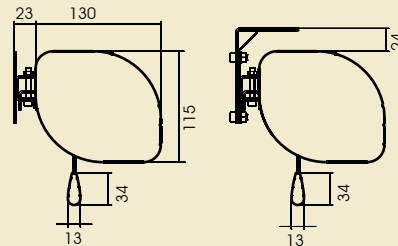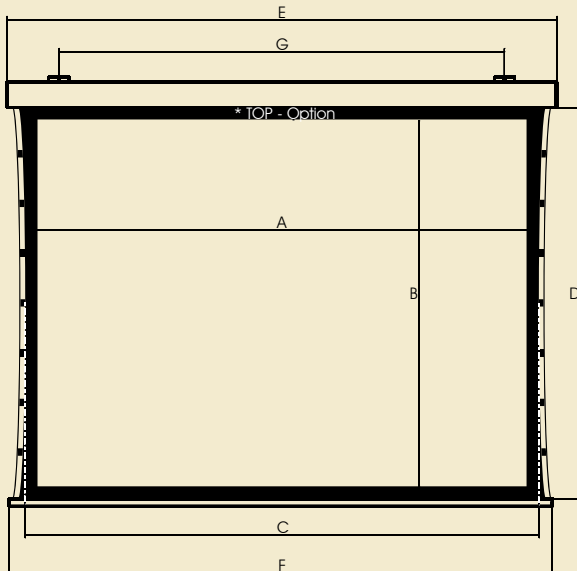

$$C = A + 100$$

$$D = B + 100$$

$$E = A + 319$$

$$F = A + 290$$

$$G > A - 860 \text{ and } G < A - 360$$

Width (cm)	Size (mm)					
	4:3		16:9		16:10	
	A	B	A	B	A	B
SUPER NOVA T. 184	1740	1310	1740	980	1740	1090
SUPER NOVA T. 204	1940	1460	1940	1090	1940	1220
SUPER NOVA T. 224	2140	1610	2140	1210	2140	1340
SUPER NOVA T. 244	2340	1760	2340	1320	2340	1470
SUPER NOVA T. 264	2540	1910	2540	1430	2540	1590
SUPER NOVA T. 284	2740	2060	2740	1540	2740	1720
SUPER NOVA T. 304	2940	2210	2940	1660	2940	1840
SUPER NOVA T. 354	3440	2580	3440	1940	3440	2150
SUPER NOVA T. 384	3740	2810	3740	2110	3740	2340
SUPER NOVA T. 404	3940	2960	3940	2220	3940	2470



Screen SUPER NOVA TENSION	
Casing	aluminium, powder coated RAL
Installation	<ul style="list-style-type: none"> ceiling; wall
P. surfaces:	<ul style="list-style-type: none"> Matt White Cine Grey
Image aspect ratio	<ul style="list-style-type: none"> 4:3 16:9 16:10 and more
Max. Width of base [cm]	500
Control system	<ul style="list-style-type: none"> wall switch option: IR RF, Trigger 5-30V, Trigger 230V, LVC, SMART Box
Back of projection surface	black (except Perforated M. W.)
Power supply	SOMFY, 220V-60Hz, 230V-50Hz; 42dB
Options	<ul style="list-style-type: none"> „B” - Background „BB” - top black belt case colours RAL + LED
„B” Background Frame	width - 5cm
Set	<ul style="list-style-type: none"> screen; installation manual; wall switch; assembly kit;
Warranty	2 years (power supply)
Producer	VIZ-ART Automation Europe